



GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



Geoflo[®]
BOMBAS SUMERGIBLES

SERIE SP


85 GPM

ACERO INOX

RANGO : 50 - 110 GPM

DESCARGA: 3" NPT

DIÁMETRO NOMINAL: 6"

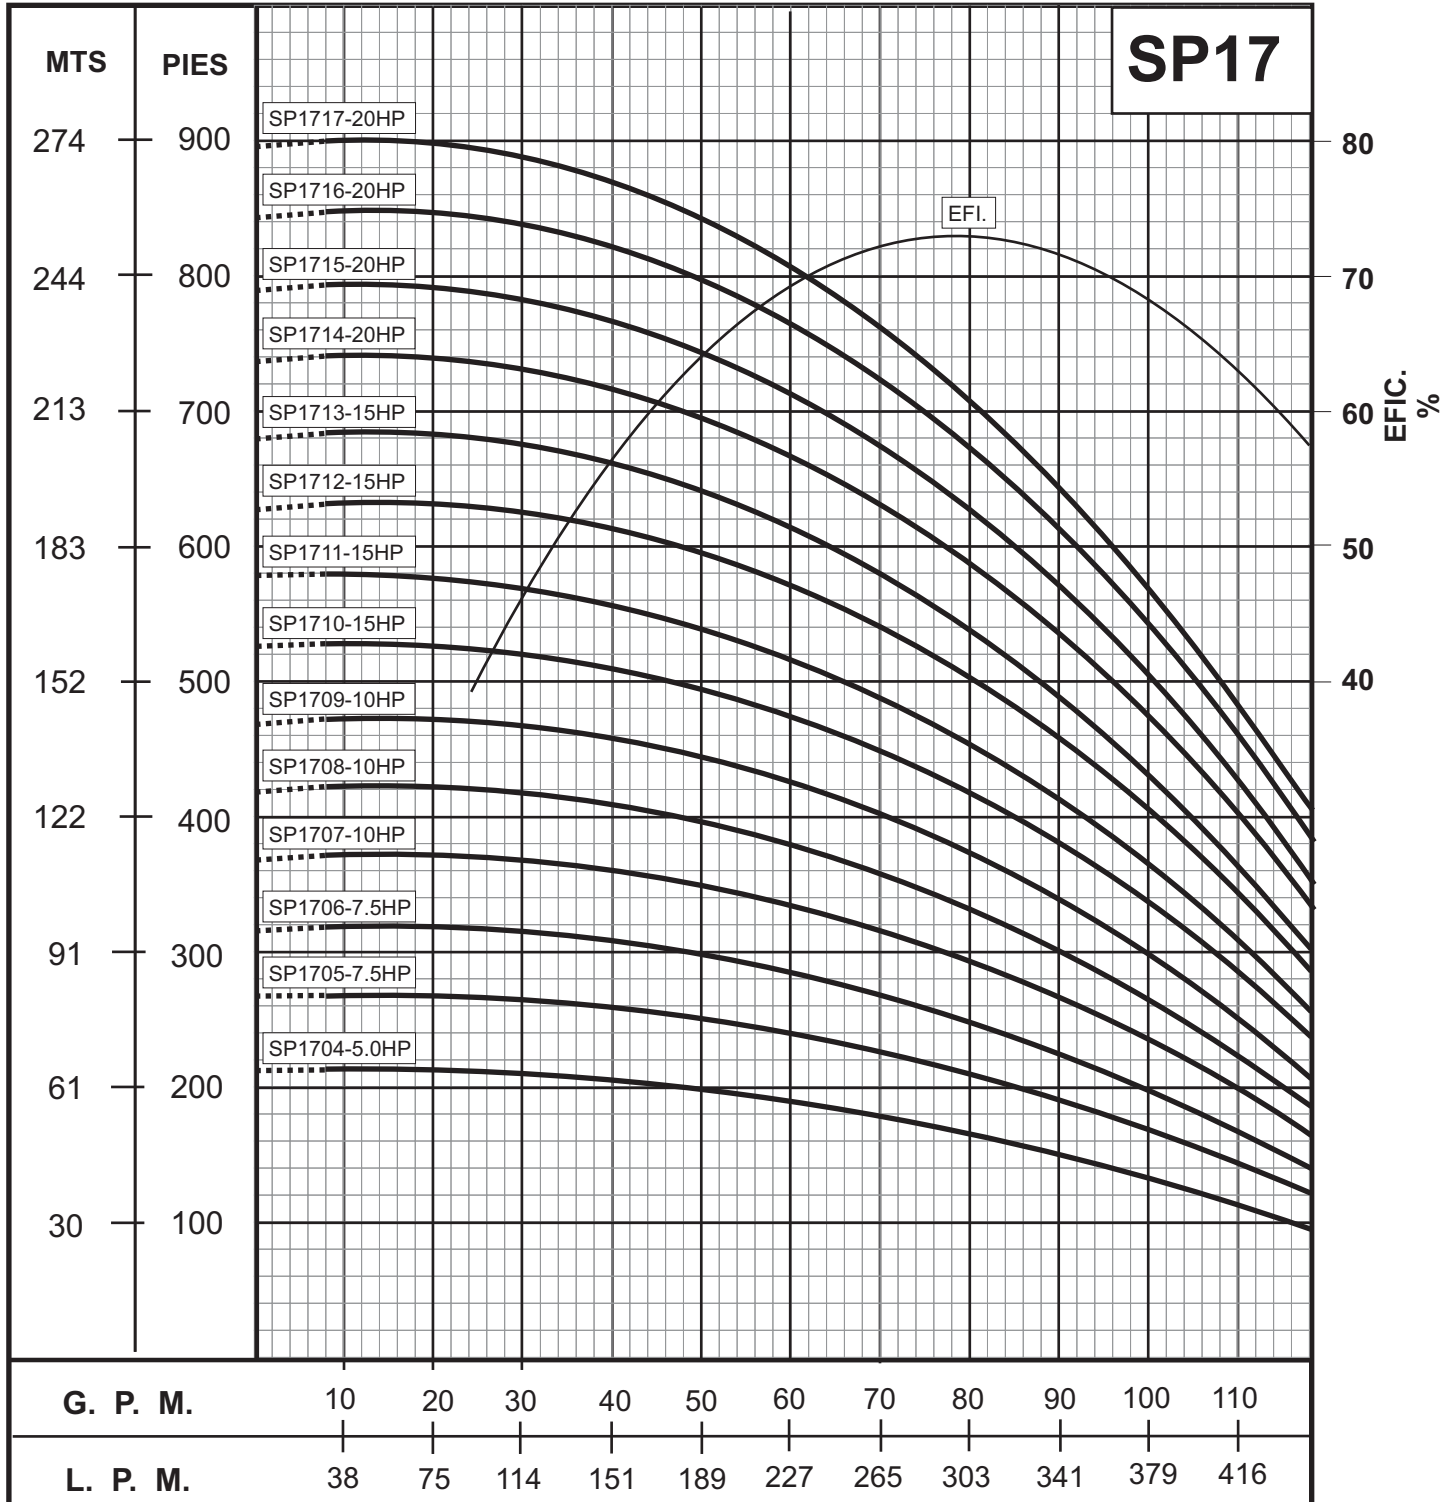

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
6" MOTOR STANDARD, 10 - 20HP/3450 RPM.

Performance conforms to ISO 2548 annex B
@ 5 ft. Min. Submergence.




GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



SERIE SP

85 GPM

ACERO INOX

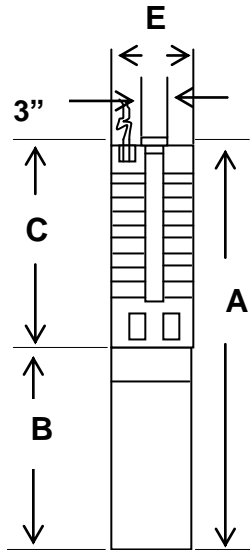

MODEL	HP	DIMENSIONS IN INCHES		MAX. WINDTH (E)	APROX.MT. (LBS)
		A	B		
SP1704(4")	5.0	43.1	23.6	5.2	77
SP1705(4")	7.5	51.5	29.6	5.2	95
SP1706(4")	7.5	53.9	29.6	5.2	97
SP1707	10	52.7	25.4	5.6	148
SP1708	10	55.0	25.4	5.6	151
SP1709	10	57.4	25.4	5.6	153
SP1710	15	62.4	28.0	5.6	170
SP1711	15	64.8	28.0	5.6	174
SP1712	15	67.2	28.0	5.6	176
SP1713	15	69.6	28.0	5.6	178
SP1714	20	74.5	30.6	5.6	193
SP1715	20	76.9	30.6	5.6	198
SP1716	20	79.3	30.6	5.6	200
SP1717	20	81.7	30.6	5.6	202

COMPONENT	MATERIAL OF CONSTRUCTIONS
Check Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Seal Ring Support Plate	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Priming Inducer	304 Stainless Steel
Coupling	329/431 Stainless Steel
Coupling Key	302/304 Stainless Steel
Pump Shaft	431 Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR/PPS
Check Valve Seat	NBR/316 Stainless Steel
Upthrust Disc	Carbon/Graphite
Upthrust Stop Washer	304 Stainless Steel



GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



Geoflo[®]
BOMBAS SUMERGIBLES

SERIE SP


85 GPM

ACERO INOX

RANGO : 50 - 110 GPM

DESCARGA: 3" NPT

DIÁMETRO NOMINAL: 6"

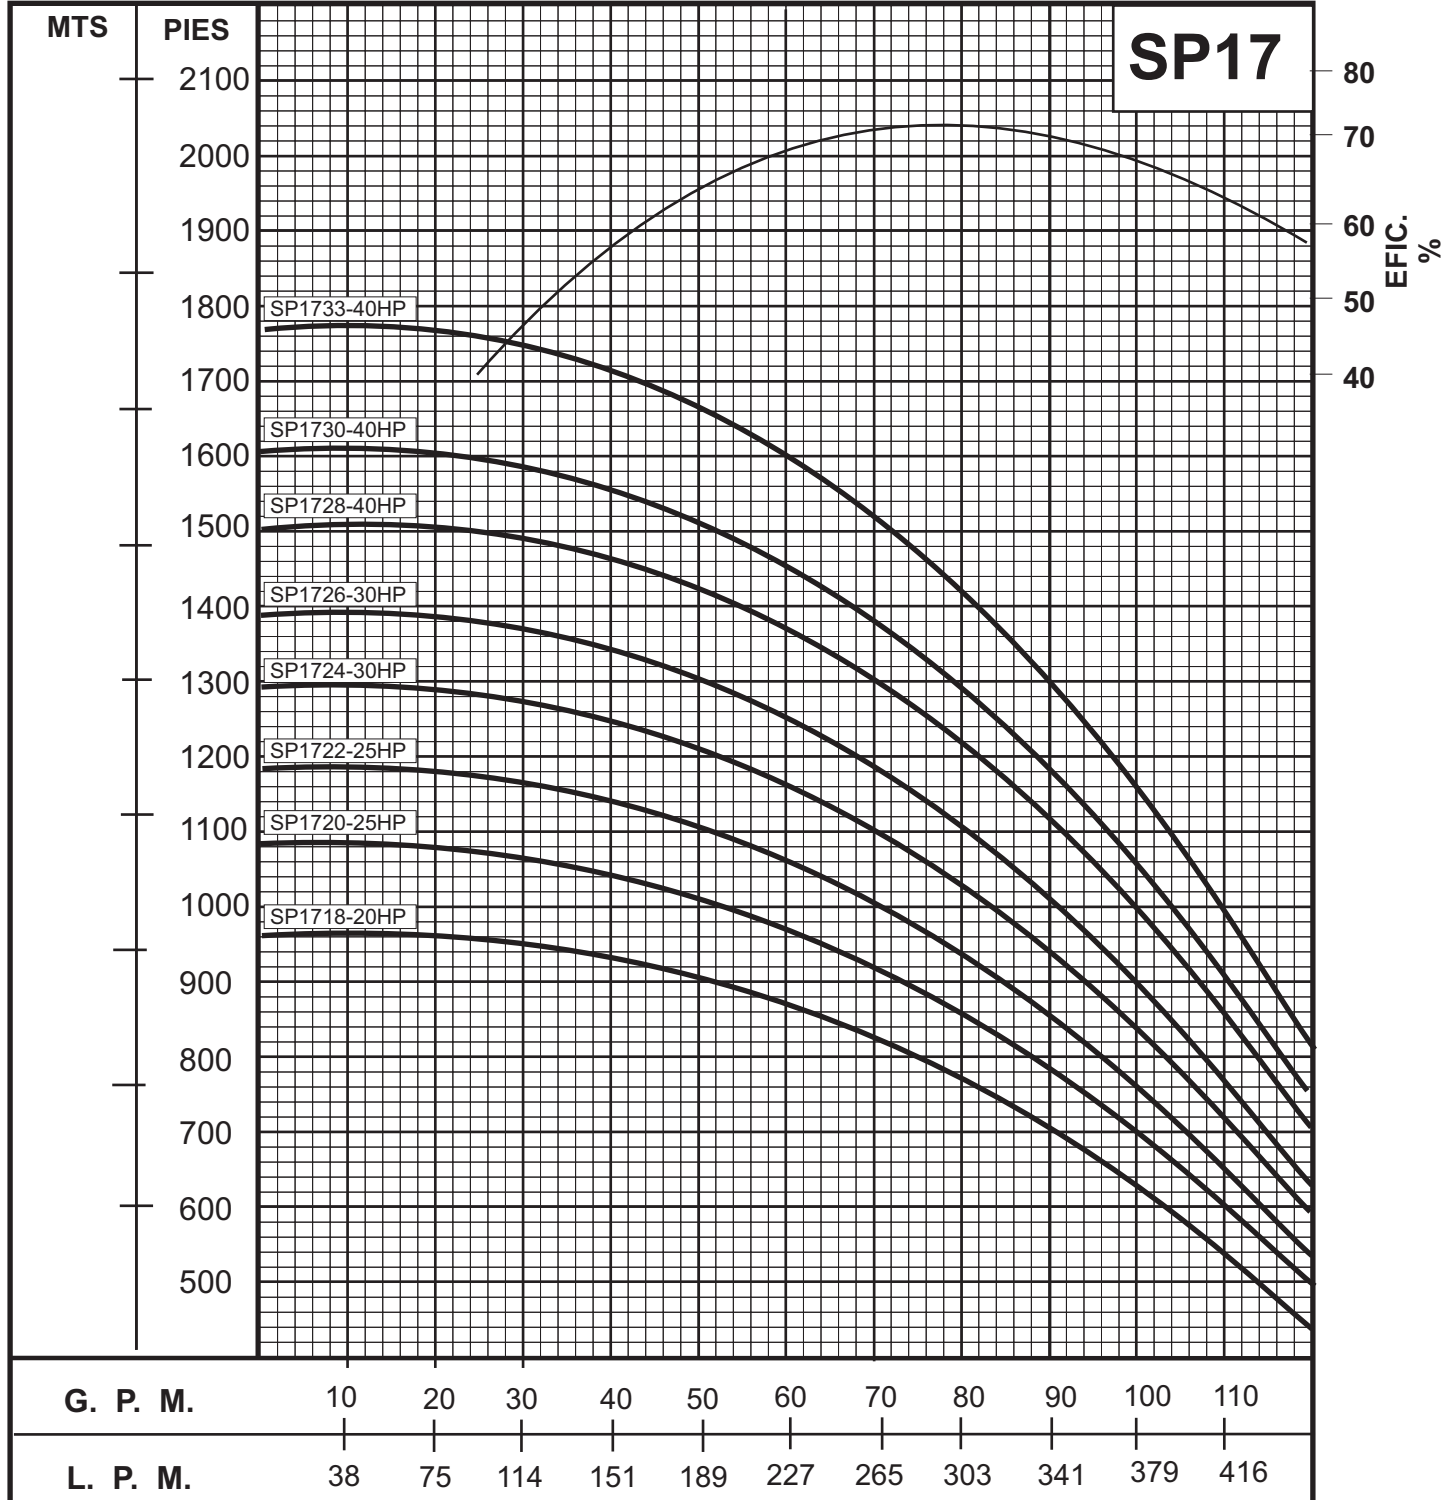

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
6" MOTOR STANDARD, 20 - 40HP/3450 RPM.


Performance conforms to ISO 2548 annex B
@ 5 ft. Min. Submergence.



GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



SERIE SP	85 GPM	ACERO INOX
-----------------	---------------	-------------------

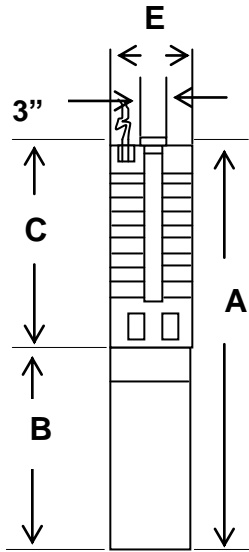

MODEL	HP	DIMENSIONS IN INCHES		MAX. WINDTH (E)	APROX.MT. (LBS)
		A	B		
SP1718	20	84.1	30.6	5.6	204
SP1720	25	91.3	33.1	5.6	244
SP1722	25	92.8	33.1	5.6	249
SP1724	30	103.5	35.7	5.6	266
SP1726	30	108.2	35.7	5.6	273
SP1728	40	118.1	40.8	5.6	281
SP1730	40	122.8	40.8	5.6	287
SP1733	40	139.7	40.8	5.6	343

COMPONENT	MATERIAL OF CONSTRUCTIONS
Check Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Seal Ring Support Plate	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Priming Inducer	304 Stainless Steel
Coupling	329/431 Stainless Steel
Coupling Key	302/304 Stainless Steel
Pump Shaft	431 Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR/PPS
Check Valve Seat	NBR/316 Stainless Steel
Upthrust Disc	Carbon/Graphite
Upthrust Stop Washer	304 Stainless Steel