



GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



Geoflo[®]
BOMBAS SUMERGIBLES

SERIE SP


385 GPM

ACERO INOX

RANGO : 300 - 480 GPM

DESCARGA: 5" NPT

DIÁMETRO NOMINAL 8"

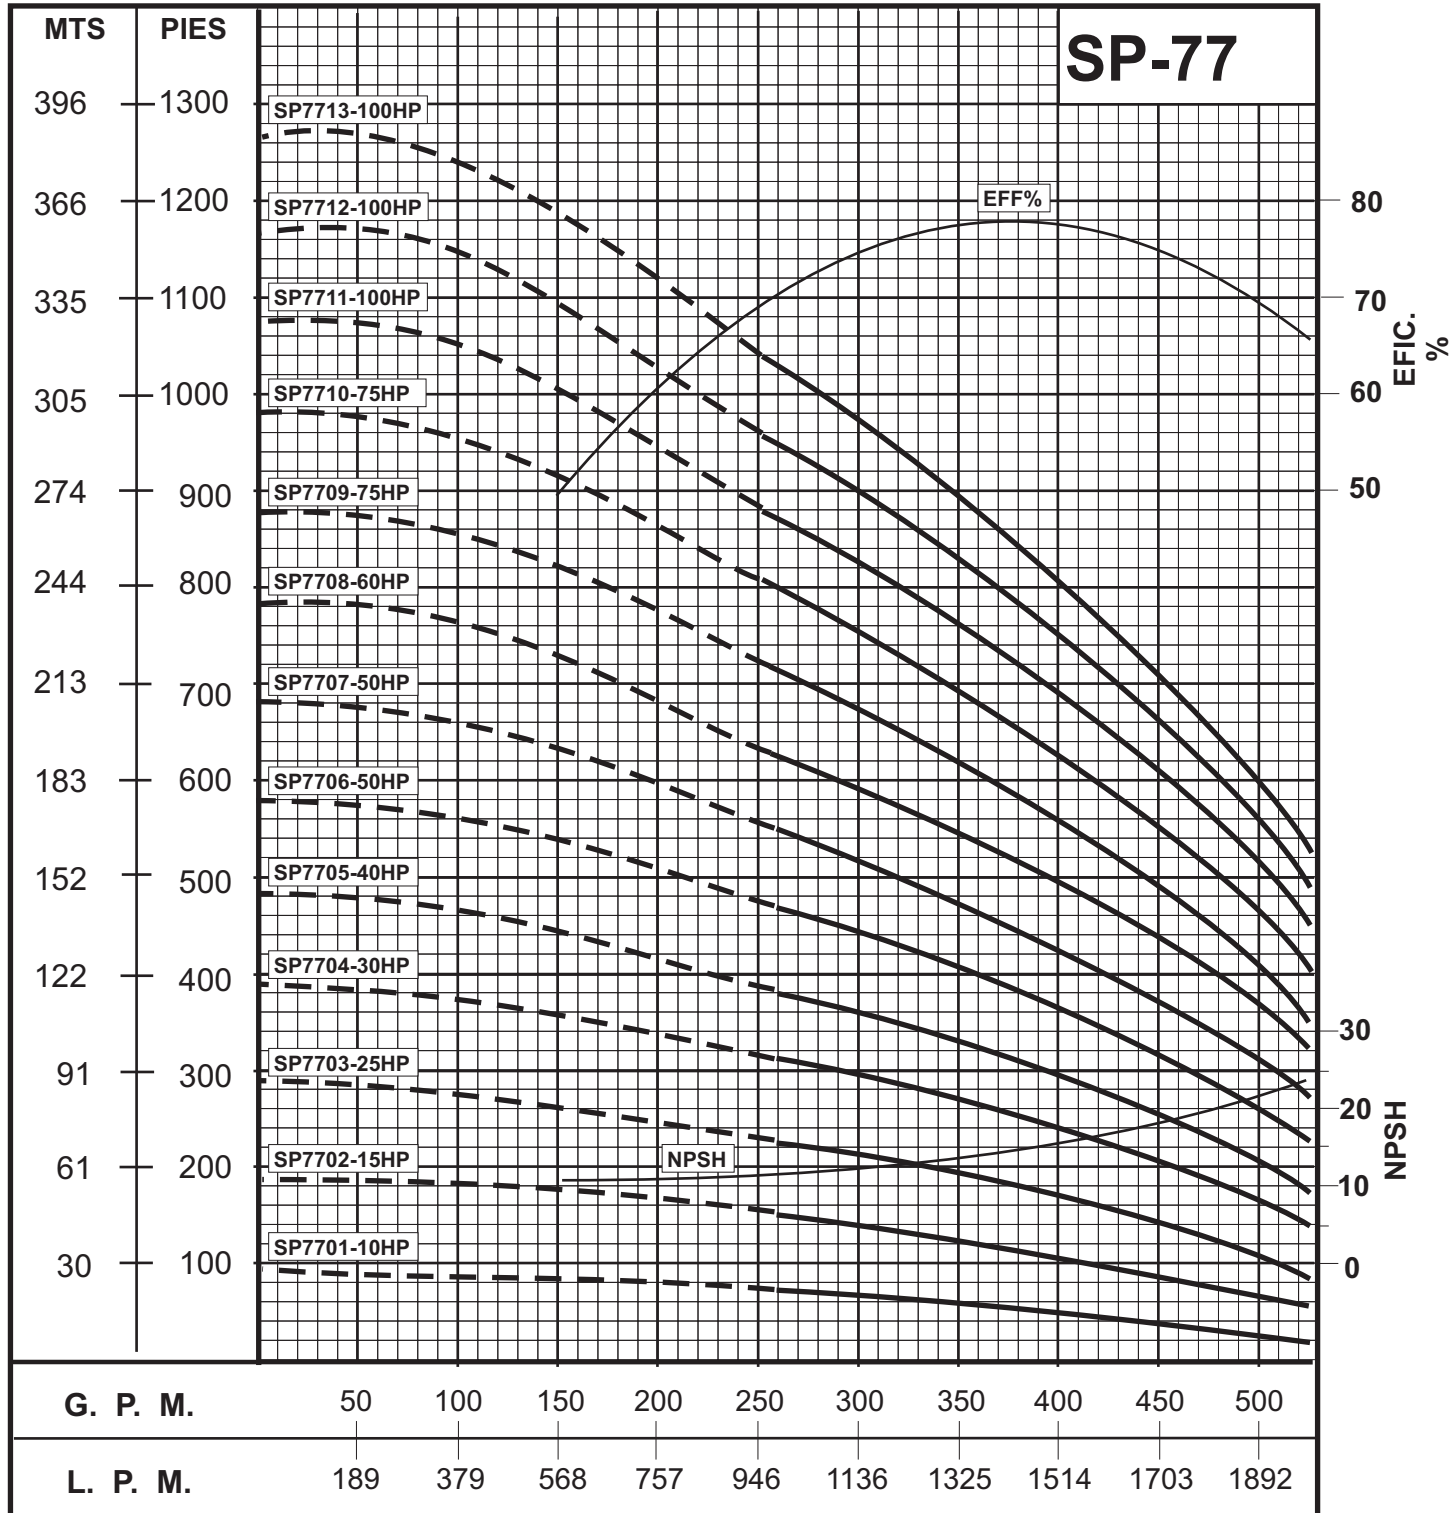

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
 6" MOTOR STANDARD, 10- 60HP/3450 RPM.
 8" MOTOR STANDARD, 75-100HP/3525 RPM.


Performance conforms to ISO 2548 annex B
 @ 8 ft. Min. Submergence.



GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



SERIE SP	385 GPM	ACERO INOX
-----------------	----------------	-------------------

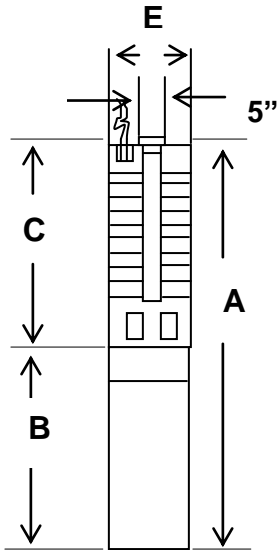

MODEL	HP	DIMENSIONS IN INCHES		MAX. WINDTH (E)	APROX.MT. (LBS)
		A	B		
SP7702	15	54.4	25.0	7.0	192
SP7703	25	64.1	29.7	7.0	223
SP7704	30	71.5	32.0	7.0	243
SP7705	40	78.9	34.4	7.0	276
SP7706	50	105.3	55.7	7.0	366
SP7707	50	110.9	55.7	7.0	375
SP7708	60	121.9	61.7	7.0	459
SP7709*	75	112.7	47.4	7.7	577
SP7710*	75	117.7	47.4	7.7	586
SP7711*	100	130.3	54.9	7.7	672
SP7712*	100	135.3	54.9	7.7	701
SP7713*	100	140.3	54.9	7.7	709

* Motor Size 8"

COMPONENT	MATERIAL OF CONSTRUCTIONS
Check Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Coupling	329/416 Stainless Steel
Coupling Key	302/304 Stainless Steel
Pump Shaft	431 Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR/PP
Lower Bearing	NBR/316 Stainless Steel
Upthrust Washer	Carbon/Graphite HY22
Upthrust Stop ring	304 S.S/ Tungsten Carbide
O-Ring	NBR
Valve Seat	304 Stainless Steel
Lower Valve Seat Retainer	316 Stainless Steel
Upper Valve Seat Retainer	304 Stainless Steel
Valve Guide	304 Stainless Steel
Valve Cup Spring	304 Stainless Steel