



GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



Geoflo[®]
BOMBAS SUMERGIBLES

SERIE SP


475 GPM

ACERO INOX

RANGO : 360 - 590 GPM

DESCARGA: 5" NPT

DIÁMETRO NOMINAL 8"

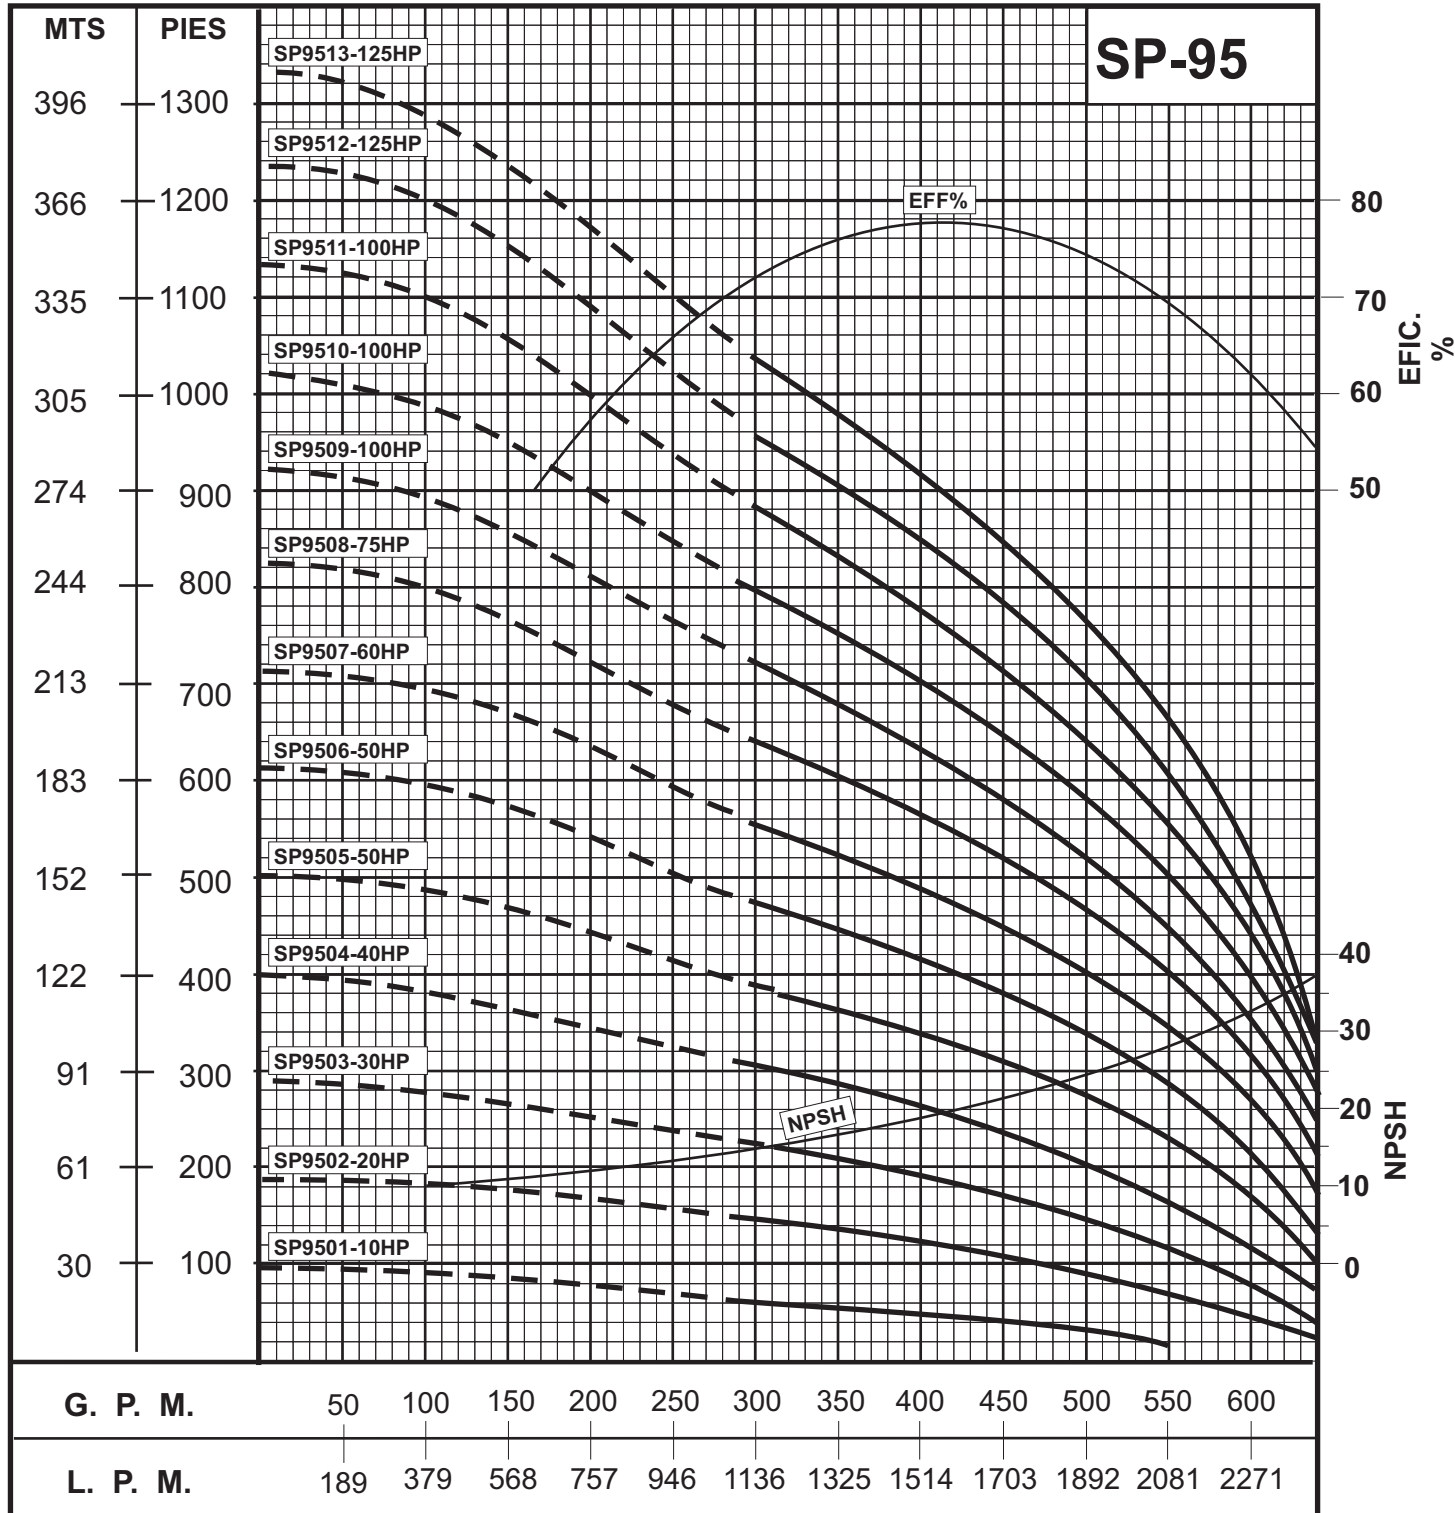

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
6" MOTOR STANDARD, 10- 60HP/3450 RPM.
8" MOTOR STANDARD, 75-125HP/3525 RPM.


Performance conforms to ISO 2548 annex B
@ 8 ft. Min. Submergence.



GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



SERIE SP	475 GPM	ACERO INOX
-----------------	----------------	-------------------

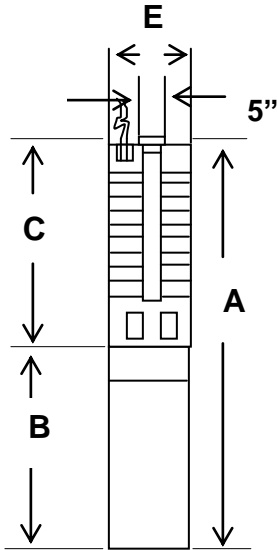

MODEL	HP	DIMENSIONS IN INCHES		MAX. WINDTH (E)	APROX.MT. (LBS)
		A	B		
SP9501	10	49.7	25.4	7.0	192
SP9502	20	60.0	29.4	7.0	192
SP9503	30	70.1	34.4	7.0	223
SP9504	40	80.3	39.5	7.0	243
SP9505	50	102.3	44.5	7.0	391
SP9506	50	103.2	50.1	7.0	433
SP9507	60	119.0	55.2	7.0	439
SP9508*	75	107.6	60.2	7.0	547
SP9509*	100	120.1	65.2	7.7	641
SP9510*	100	125.2	70.3	7.7	648
SP9511*	100	130.3	75.4	7.7	654
SP9512*	125	149.2	80.4	7.7	862
SP9513*	125	154.3	85.5	7.7	868

*Motor size 8"

COMPONENT	MATERIAL OF CONSTRUCTIONS
Check Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Coupling	329/416 Stainless Steel
Coupling Key	302/304 Stainless Steel
Pump Shaft	431 Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR/PP
Check Valve Seat	NBR/316 Stainless Steel
Top Bearing	NBR/304 Stainless Steel
Upthrust Disc	Carbon/Graphite HY22
Check Valve Spring	401 Stainless Steel
O-Ring	NBR
Valve Seat	304 Stainless Steel
Lower Valve Seat Retainer	316 Stainless Steel
Upper Valve Seat Retainer	304 Stainless Steel