GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS

Geoflo®
BOMBAS SUMERGIBLES

SERIE ST	25 GPM	INOX. NORYL

RANGO : 20 - 30 GPM DESCARGA: 1-1/2" NPT DIAMETRO NOMINAL 4"

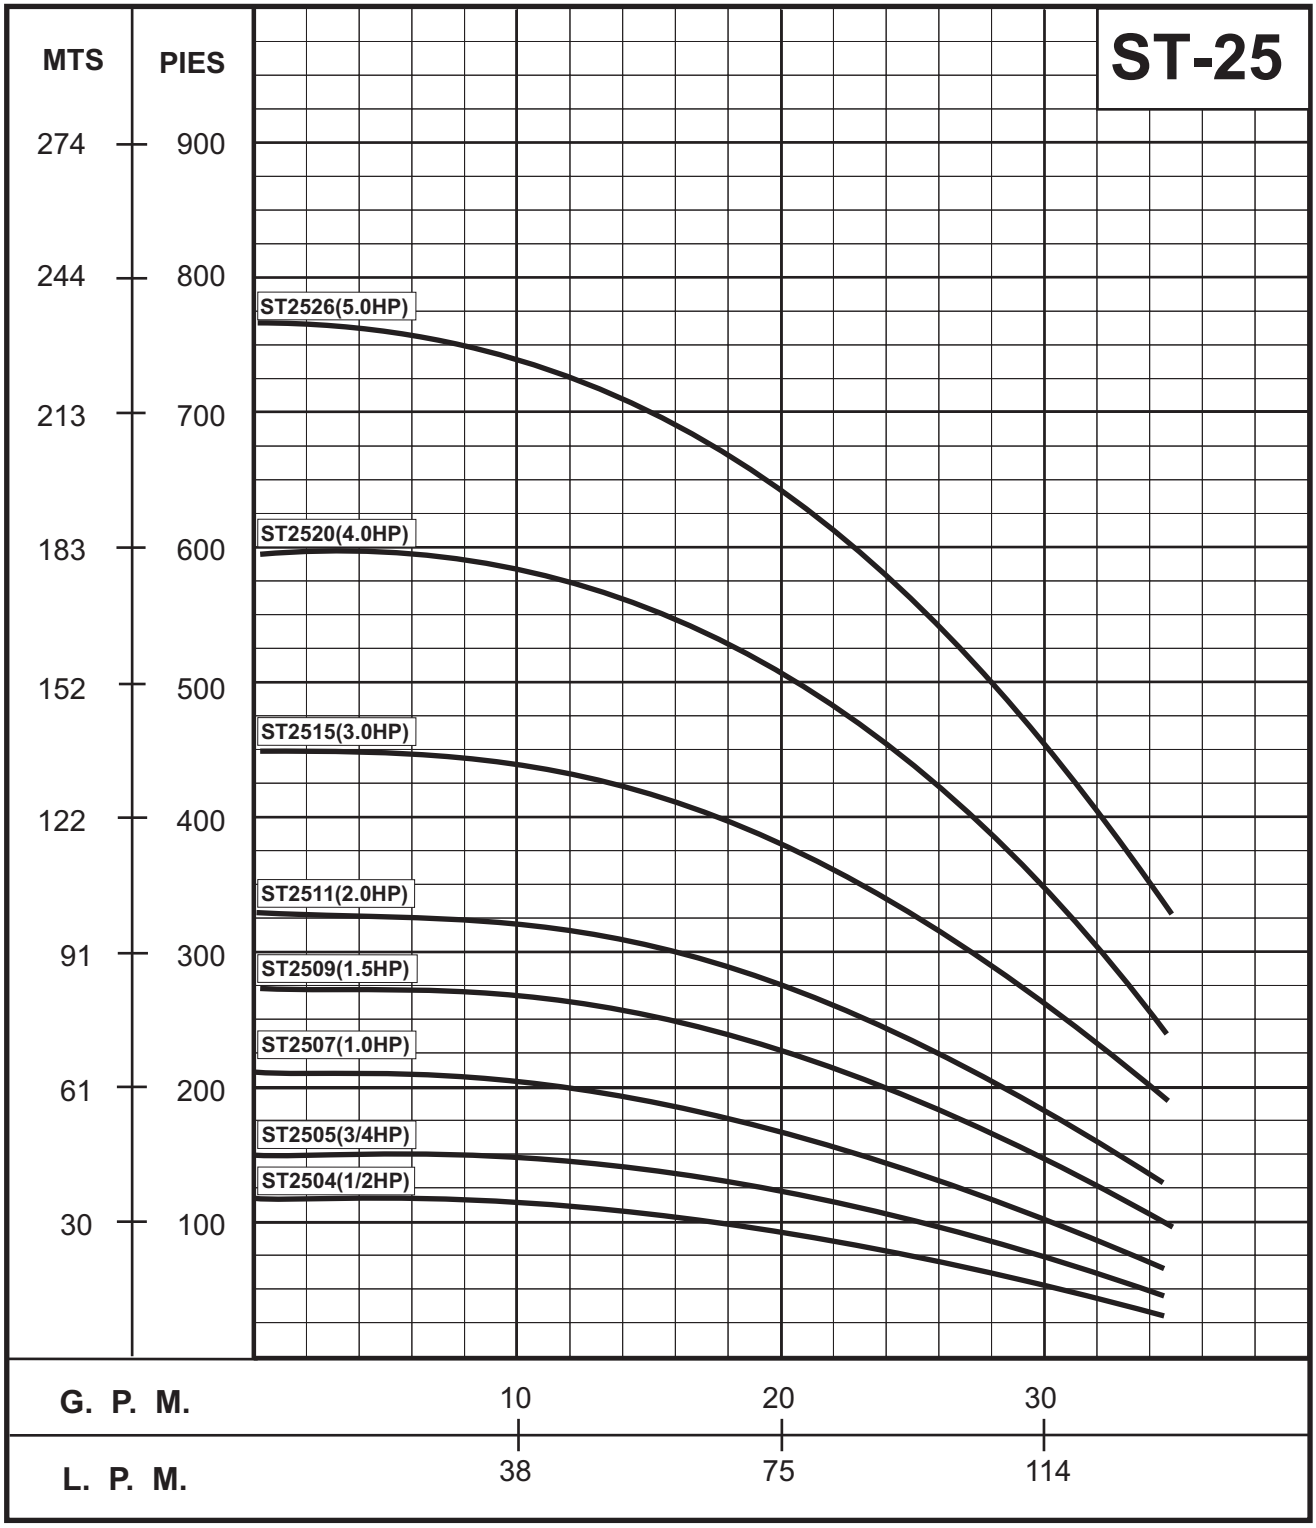

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
4" MOTOR STANDARD, 3450 RPM.

Performance conforms to ISO 2548 annex B
@ 2 ft. Min. Submergence.