



GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



Geoflo[®]
BOMBAS SUMERGIBLES

SERIE ST


40 GPM

INOX. NORYL

RANGO : 32 - 48 GPM

DESCARGA: 2" NPT

DIAMETRO NOMINAL 4"

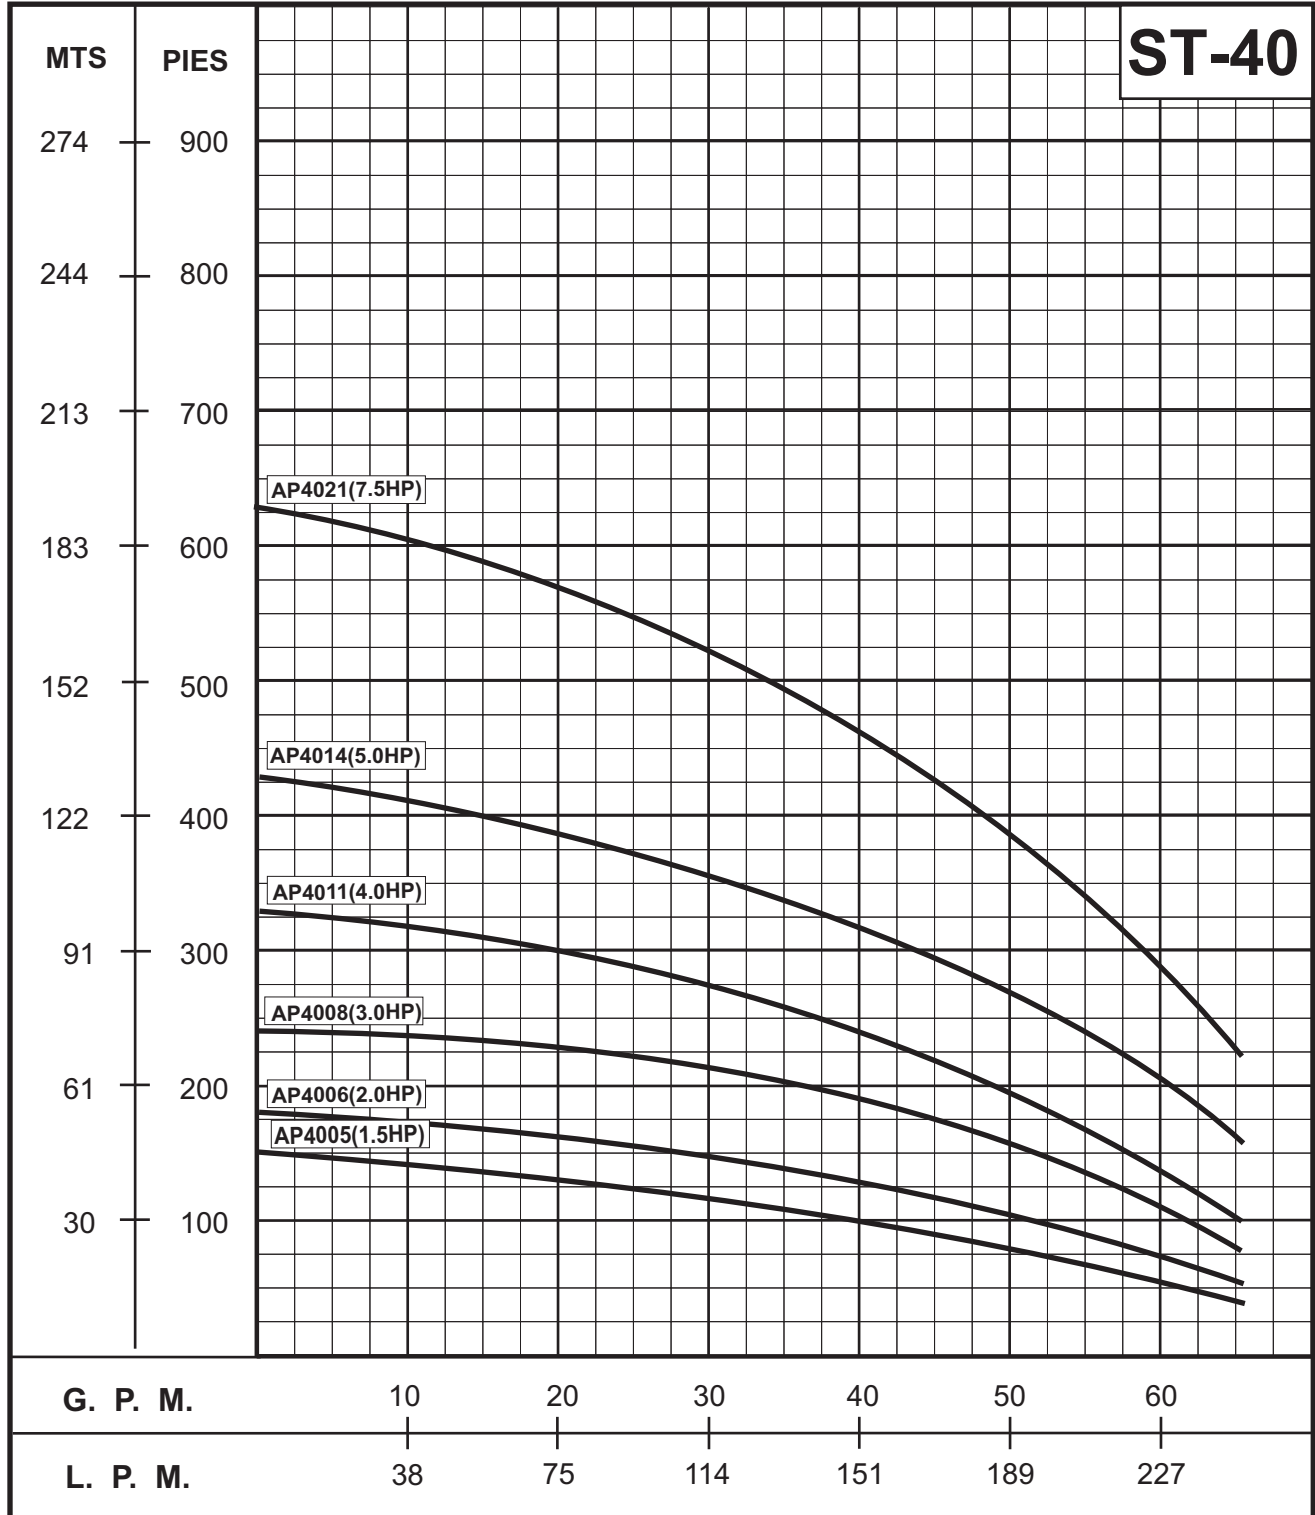

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. Performance conforms to ISO 2548 annex B
4" MOTOR STANDARD, 3450 RPM. @ 5 ft. Min. Submergence.