



GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



Geoflo[®]
BOMBAS SUMERGIBLES

SERIE ST


80 GPM

INOX. NORYL

RANGO : 65 - 95 GPM

DESCARGA: 2" NPT

DIAMETRO NOMINAL 4"

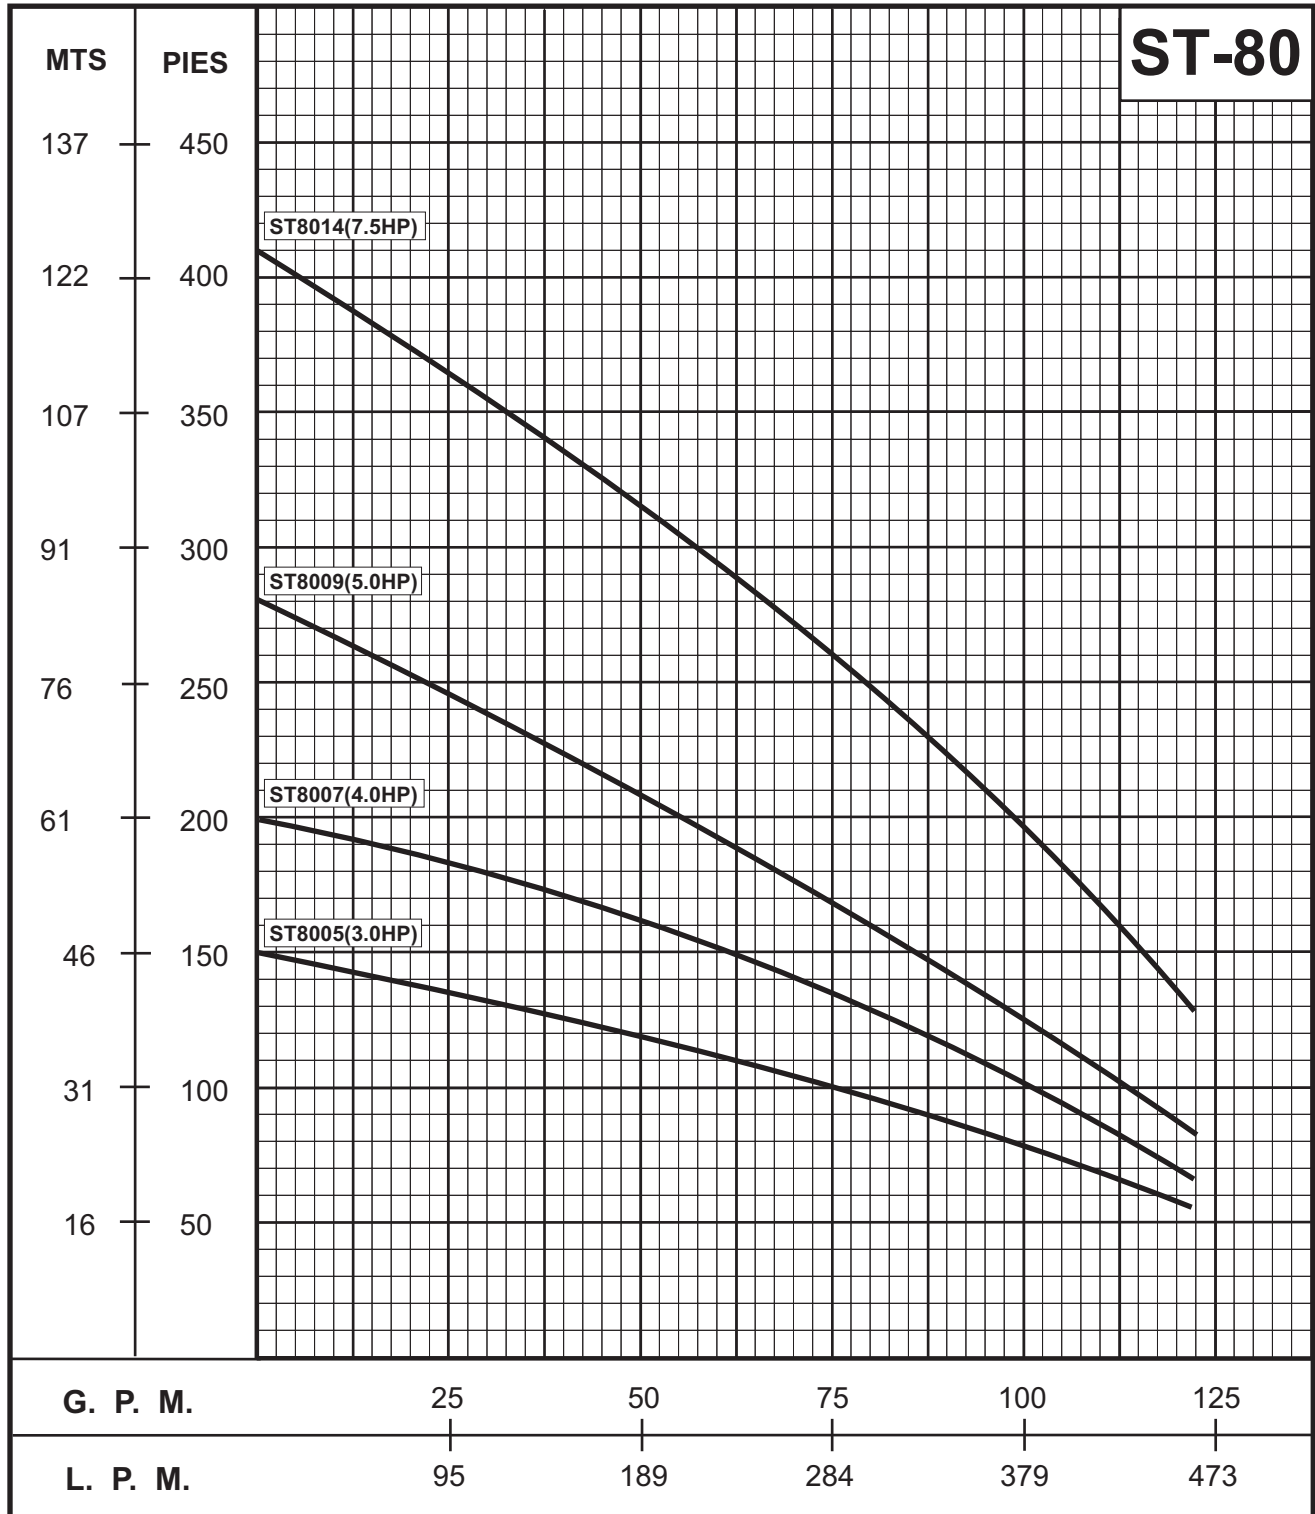

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. Performance conforms to ISO 2548 annex B 4" MOTOR STANDARD, 3450 RPM. @ 5 ft. Min. Submergence.