



GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



Geoflo[®]
BOMBAS SUMERGIBLES

SERIE SP


300 GPM

ACERO INOX

RANGO : 225 - 380 GPM

DESCARGA: 3" ó 4" NPT

DIÁMETRO NOMINAL 6"

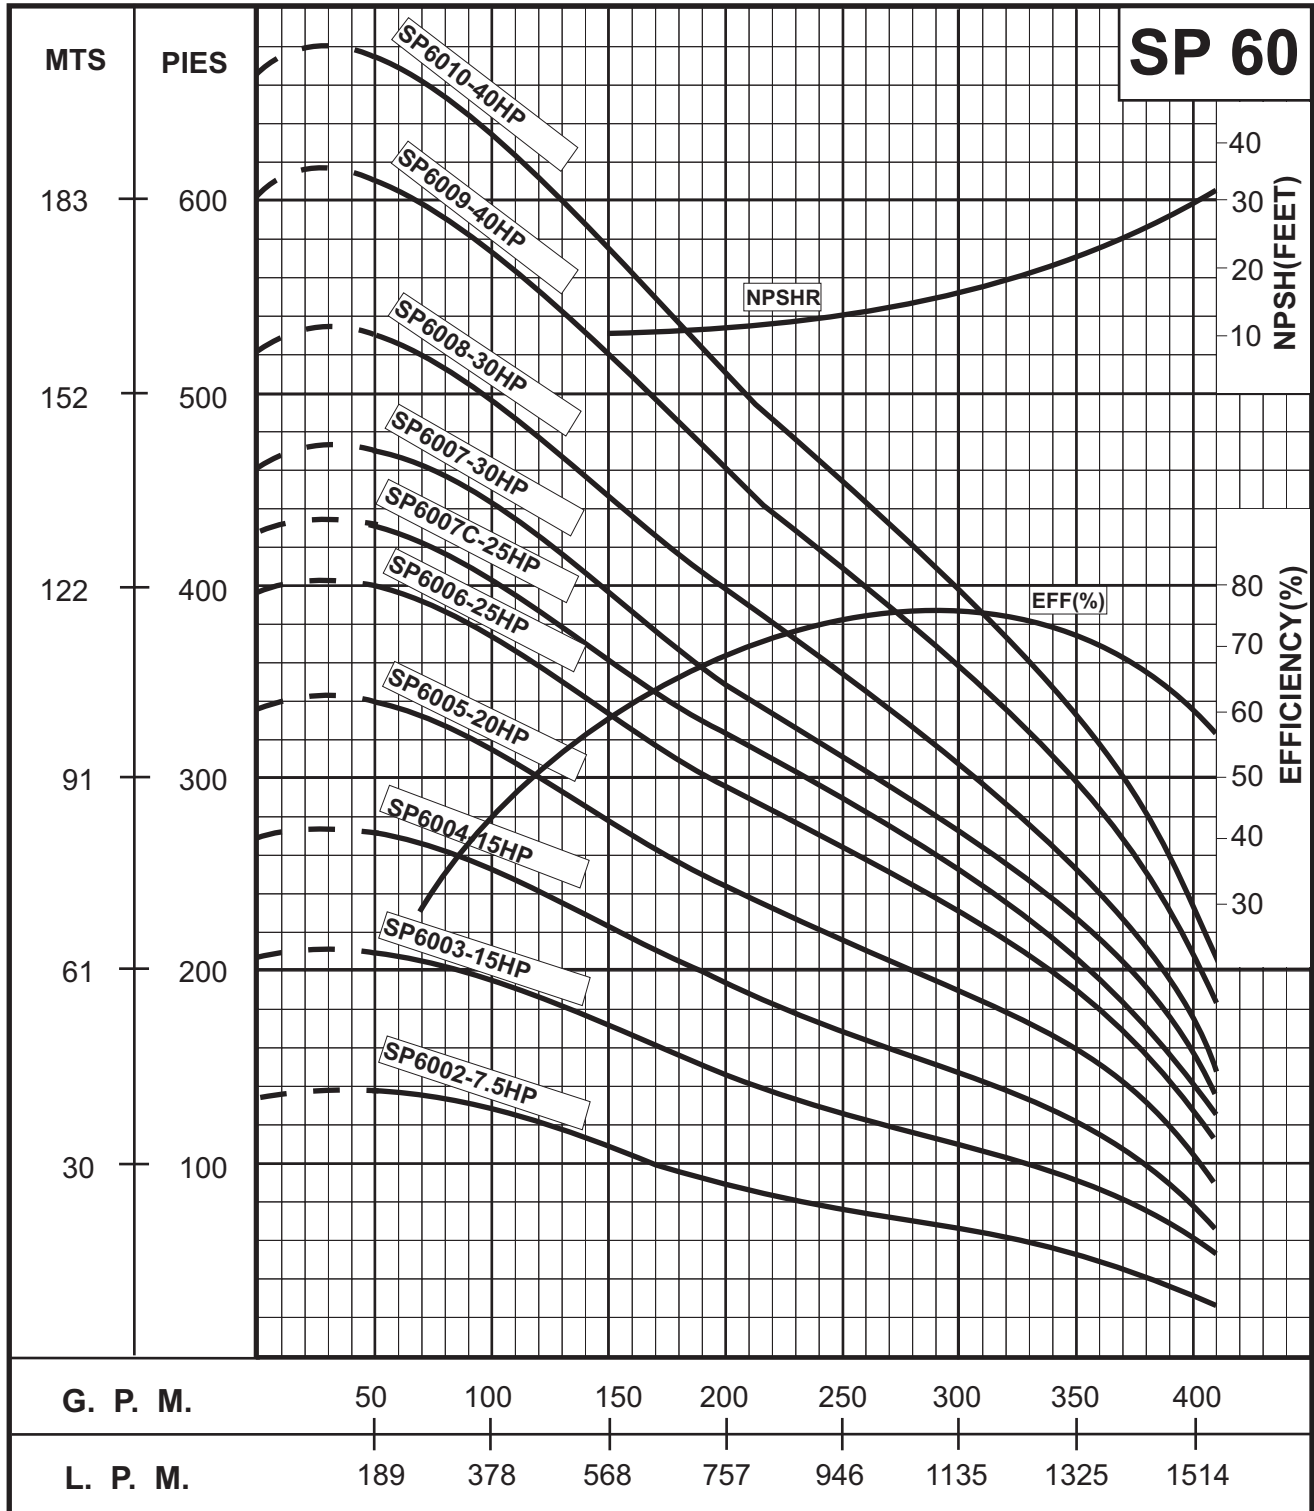


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. Performance conforms to ISO 2548 annex B
6" MOTOR STANDARD, 3450 RPM. @ 8 ft. Min. Submergence.



GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



SERIE SP	300 GPM	ACERO INOX
-----------------	----------------	-------------------

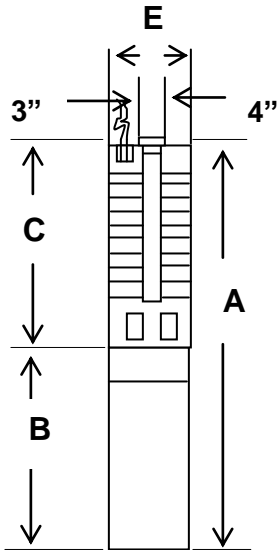

MODEL	HP	DIMENSIONS IN INCHES		MAX. WINDTH (E)	APROX.MT. (LBS)
		A	B		
SP6002(4")	7.5	48.0	29.6	5.7	104
SP6003	15	51.9	28.0	5.7	170
SP6004	15	56.4	28.0	5.7	177
SP6005	20	63.4	30.5	5.7	197
SP6006	25	72.6	33.1	5.7	214
SP6007C	25	76.1	33.1	5.7	216
SP6008	30	82.2	35.7	5.7	241
SP6009	40	91.4	40.8	5.7	281
SP6010	40	95.9	40.8	5.7	286

COMPONENT	MATERIAL OF CONSTRUCTIONS
Check Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Coupling	329/416 Stainless Steel
Coupling Key	302/304 Stainless Steel
Pump Shaft	431 Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR/304 Stainless Steel
Check Valve Seat	NBR/316 Stainless Steel
Top/Lower Bearing	NBR/316 Stainless Steel
Upthrust Washer	Carbon/Graphite HY22
Upthrust Stop ring	304 S.S/ Tungsten Carbide



GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



Geoflo[®]
BOMBAS SUMERGIBLES

SERIE SP


300 GPM

ACERO INOX

RANGO : 225 - 380 GPM

DESCARGA: 3" ó 4" NPT

DIÁMETRO NOMINAL 6"

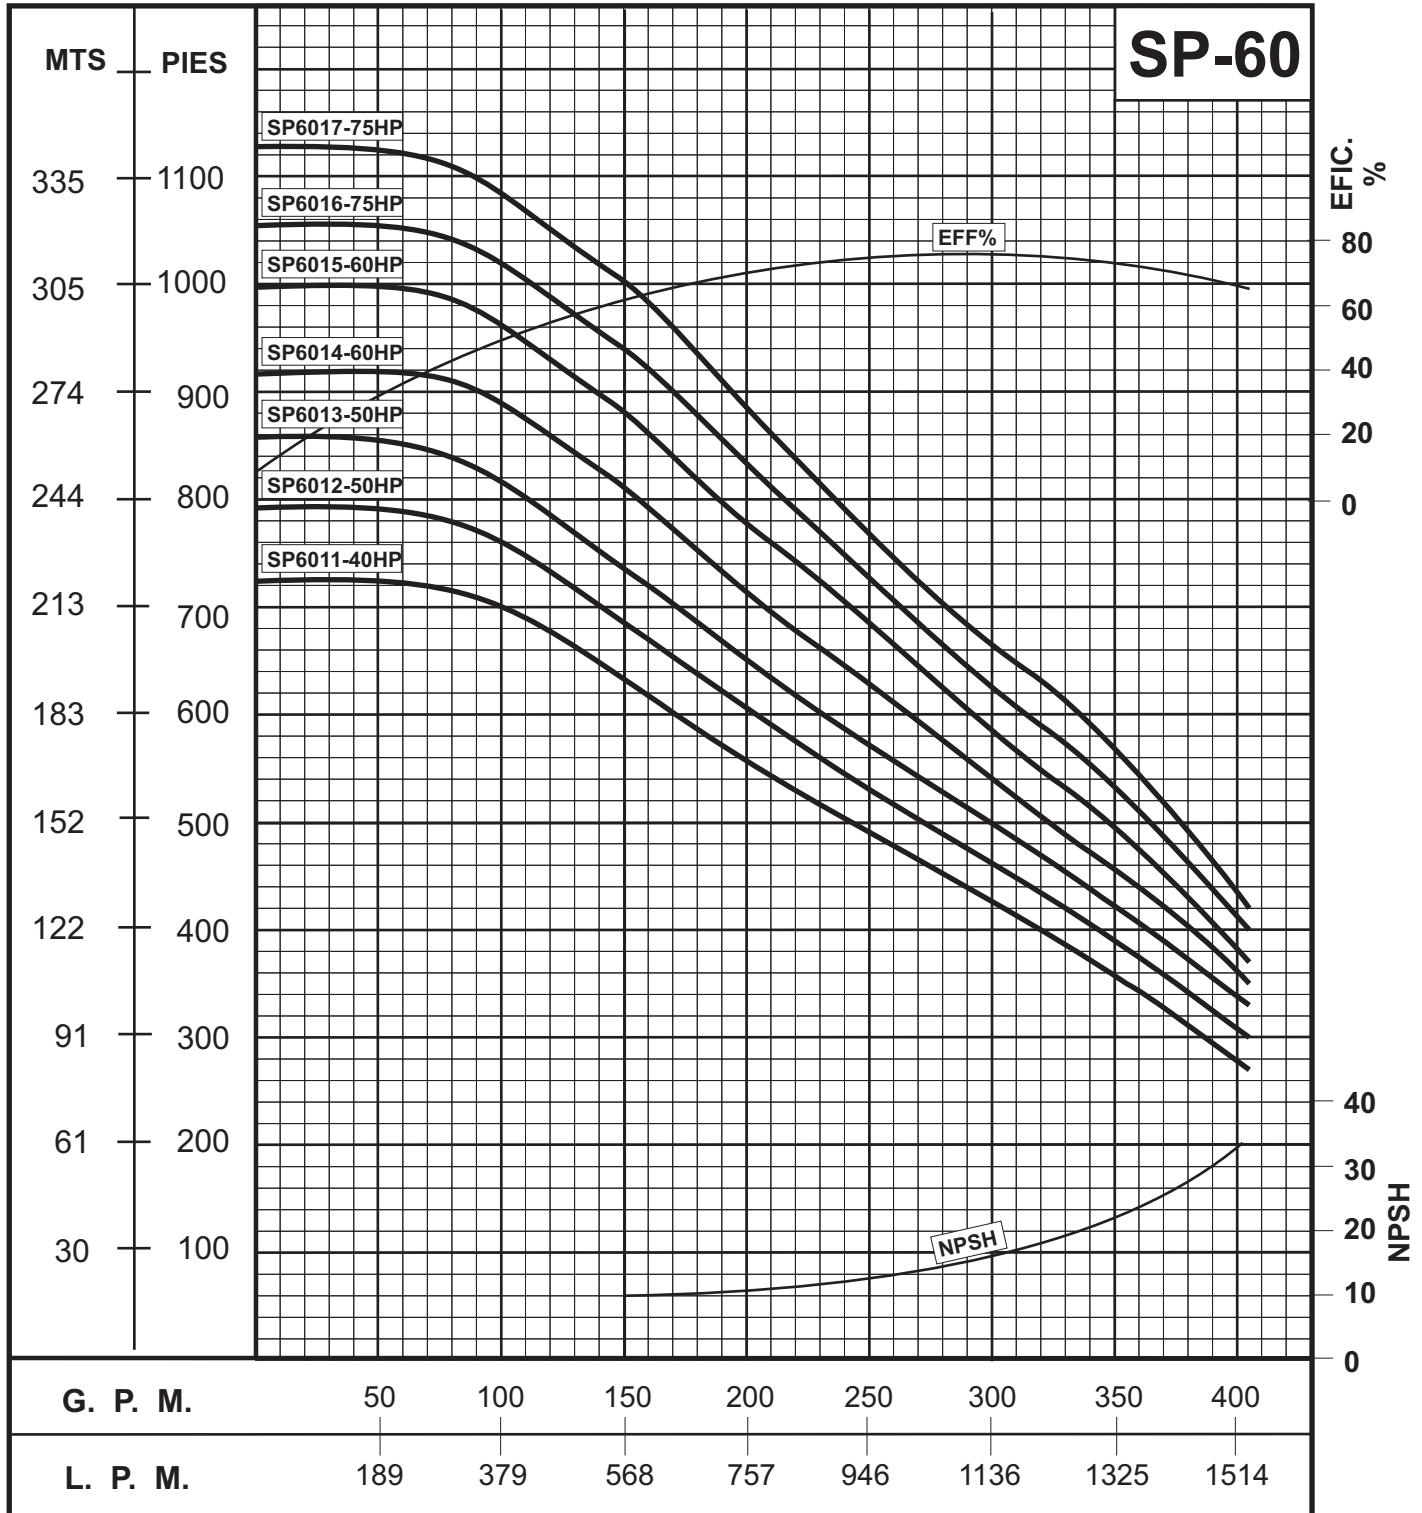

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. Performance conforms to ISO 2548 annex B
 6" MOTOR STANDARD, 15-60HP/3450 RPM. @ 8 ft. Min. Submergence.
 8" MOTOR STANDARD, 75HP/3450 RPM.




GEOBOMBAS
TECNOLOGÍA PARA FLUIDOS



SERIE SP

300 GPM

ACERO INOX

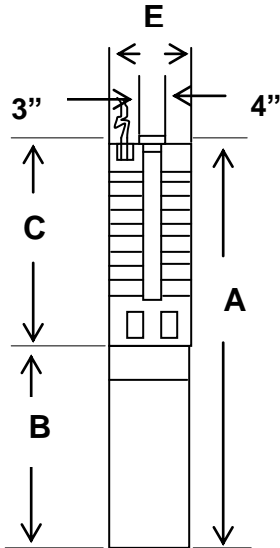

MODEL	HP	DIMENSIONS IN INCHES		MAX. WINDTH (E)	APROX.MT. (LBS)
		A	B		
SP6011	50	97.8	57.8	5.7	292
SP6012	50	116.8	57.8	5.7	396
SP6013	50	126.2	57.8	5.7	402
SP6014	60	137.8	63.8	7.1	447
SP6015	60	142.3	63.8	7.1	484
SP6016*	75	134.8	47.8	7.5	540
SP6017*	75	134.8	47.4	7.5	544

8" MOTOR REQUIRED

COMPONENT	MATERIAL OF CONSTRUCTIONS
Check Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Coupling	329/416 Stainless Steel
Coupling Key	302/304 Stainless Steel
Pump Shaft	431 Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR/304 Stainless Steel
Check Valve Seat	NBR/316 Stainless Steel
Top/Lower Bearing	NBR/316 Stainless Steel
Upthrust Washer	Carbon/Graphite HY22
Upthrust Stop ring	304 S.S/ Tungsten Carbide